




Proved bearing principle with rigid spindle collar, flexible spindle step and coil damping.

Low energy consumption and low noise level due to modern engineering facility and use of spindles with small wharve diameters.

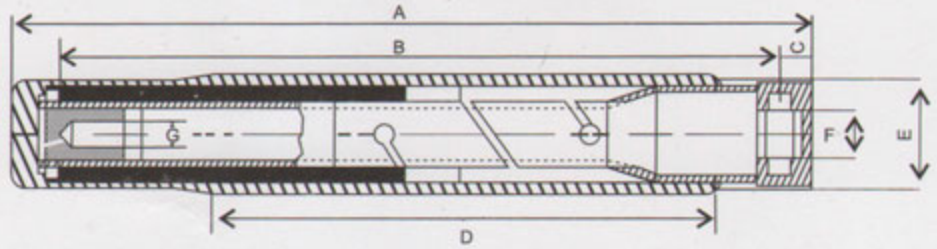

Spindle bearing Unit	Dimensions (mm)						
	A	B	C	D	E	F	G
ST 1	148	119.5	6.5	M22X1.5	16	6.8	4.5
ST 2	148	119.5	6.5	M22X1.5	19.5	7.8	4.5
ST 21	148	119.5	6.5	M22X1.5	17.5	7.8	4.5
ST 3C	165	135	7	M25X1.5	21.7	8.8	5.5
ST 33	145	130.6	7	M25X1.5	21.7	8.8	5.45
ST 35	165	134.5	7	M25X1.5	21.7	8.8	8.45
ST 44	184.5	150	7.5	M27X1.5	23.7	10	6.45
ST 45	170	150	7.5	M27X1.5	23.7	10	7.95
ST 55	193	170	9.3	M32X1.5	28.2	12	7.95
ST 56	153.3	130	9.3		28.2	12	9
ST 56	125	105	9.3		28.2	12	8
ST 66	235	212	10	M35X1.5	32.0	14	8.95
ST 68	235	212	10	M35X1.5	32.0	14	10.95

SUNRISE Textile Bearings

MFG OF: ALL TYPES OF A/T TFO SPINDLE• DOUBLING• SPINNING• TWISTING & HOLLOW SPINDLE

SARDAR MARKET ROAD, DEVSAR - BILIMORA - 396 321 DIST : NAVSARI, GUJARAT - INDIA

TEL: ++91-2634-283290 FAX: ++91-2634-289662

e-mail: info@sunrisetextbearings.com